




24-314 Audi MMI 2 AUX in interface

Compatible with the Audi 2G MMI High systems in the following models:

Audi A6, Audi A8, Audi Q7 from 2005 onwards

Also compatible with the Audi A4 (B8), Audi A5 and Audi Q5 with the 2G MMI High upgrade option.

Not compatible with 2G MMI Basic (see below), 3G MMI or the Concert/Symphony radios.

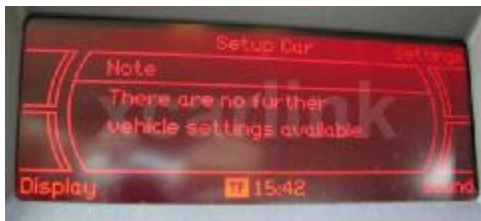

Not compatible with cars with this screen

It connects directly to the fibre optic connection on the back of the CD changer and then allows you to connect any audio device such MP3 player, MP4 player, iPod, DVD etc though the phono AUX in connections.

The new Aux input will appear as an additional "CD" which can be selected via the MMI system



Install the unit behind the CD changer, usually found in the glove box. Connect the fibre optic connector between the existing CD changer and the car. and then connect the wiring loom to 12v power and Ground.

An RCA to 3.5mm cable can be used to connect the interface to the headphone jack of your audio device (not included).