


Installation Steps

- The factory camera wire position can vary between vehicles.
- Before fitting the 27-241, check the vehicle's original factory connector and look at where the camera wires are positioned. On some vehicles the camera wires may be in the top section of the connector, and on others they may be in the bottom section. (see diagram)



- The 27-241 must be connected to match the position of the camera wires in the vehicle. Do not assume the pin position is the same on every vehicle.
- If the camera image does not appear after installation, check that the 27-241 has been pinned into the correct position to match the factory camera wiring.

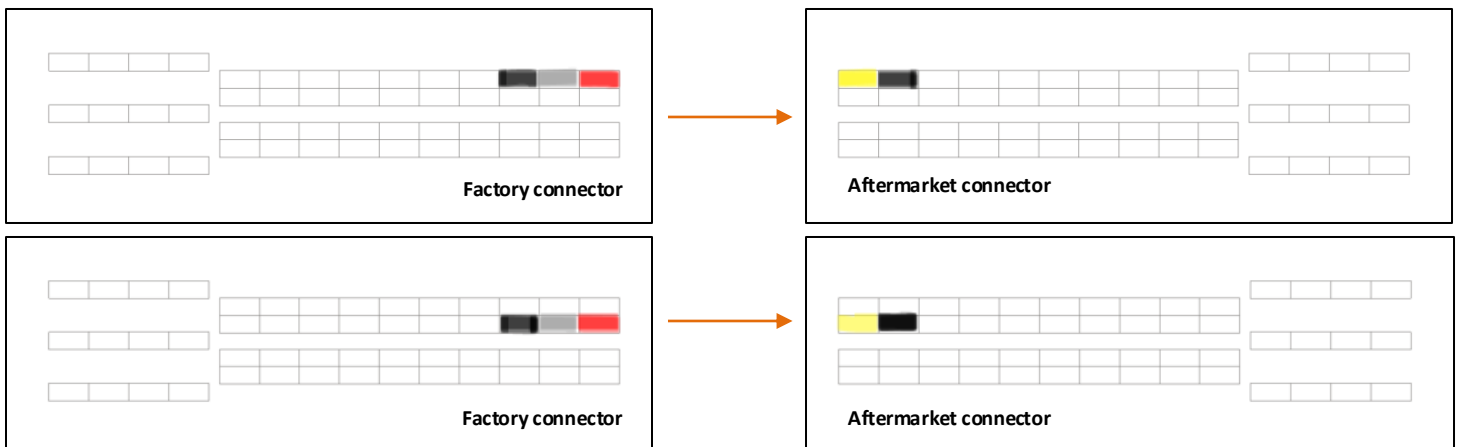


Need Technical Support?

Message our team on Whatsapp: 07770 814 793


Send your questions and photos so we can help you as quickly as possible.



Chat on WhatsApp

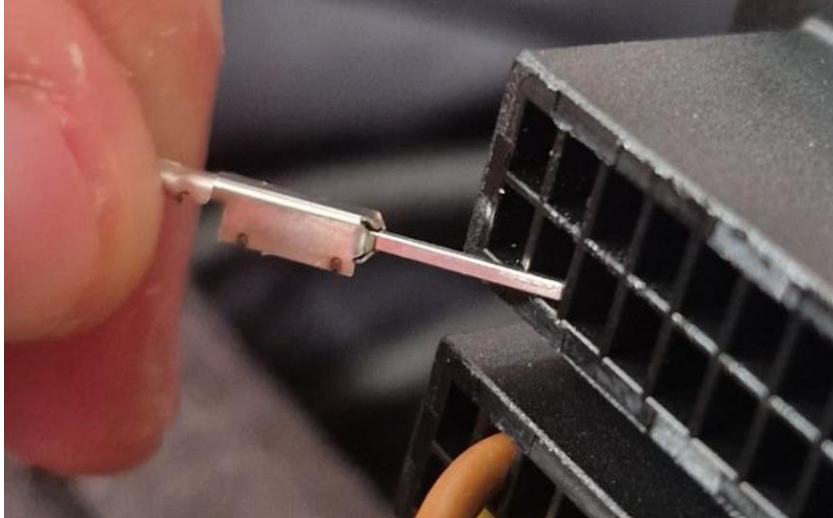

If pin is on the bottom row, tab must face down, towards the middle of the whole block

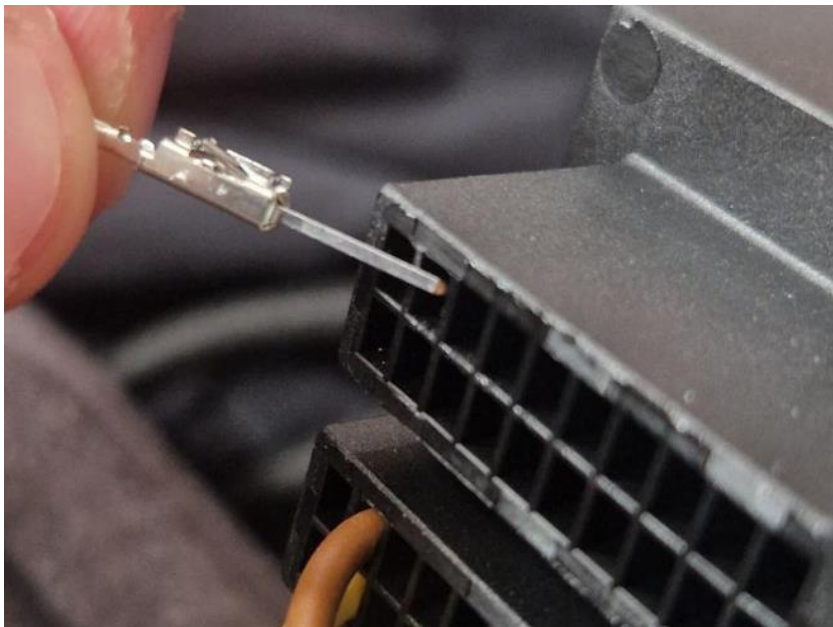

If pin is on the top, pin must face up, away from the main block

Need Technical Support?

Message our team on Whatsapp: 07770 814 793

Send your questions and photos so we can help you as quickly as possible.



Chat on WhatsApp