



Nissan NP300 2017 ONWARDS KIT FEATURES

- ISO DDIN radio provision
- Painted matte black

KIT COMPONENTS

- A) Radio trim panel • B) Radio brackets • C) (10) Panel clips






TABLE OF CONTENTS

Dash Disassembly	2
Kit Assembly	3

TOOLS REQUIRED

- Panel removal tool • Phillips screwdriver

CAUTION! All accessories, switches, climate controls panels, and especially air bag indicator lights must be connected before cycling the ignition. Also, do not remove the factory radio with the key in the on position, or while the vehicle is running.


DASH DISASSEMBLY

1. Unclip and remove the left and right side panels from the factory radio (or pocket in radio delete models).
2. Remove (2) Phillips screw securing the climate control trim panel, and then unclip and remove the panel.
3. Remove (4) Phillips screw securing the radio or pocket trim panel, and then unclip and remove the panel.
4. Remove (4) Phillips screws securing the radio or pocket, then unplug and remove the radio or pocket.

Continue to Kit Assembly

KIT ASSEMBLY

1. Secure the *radio brackets* to the radio using the screws supplied with the radio. (Figure A)
2. Locate the factory wiring harness and antenna connector in the dash and complete all necessary connections to the radio. Test the radio for proper operation.
3. Secure the radio assembly to the dash using the factory screws.
4. Attach the (10) *panel clips* onto the radio trim panel, then snap the panel over the radio assembly to complete the installation.

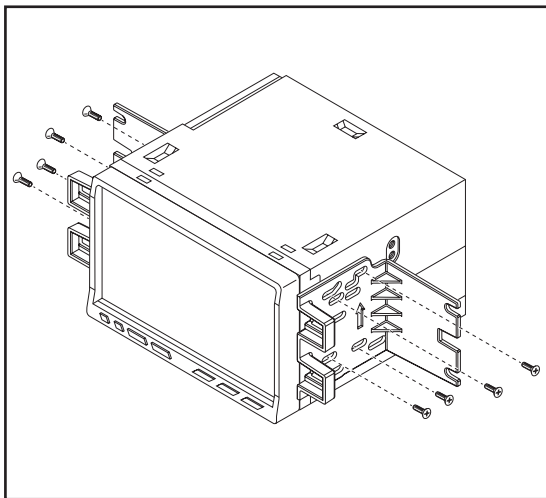

(Figure A)