




1. Unclip the display panel



2. Remove the display panel

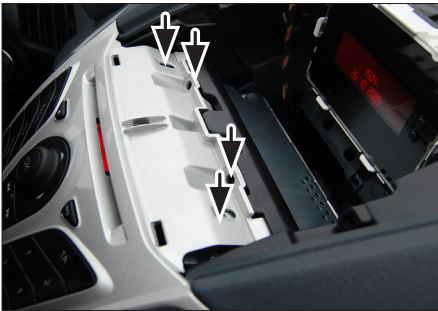


3. Remove the 4 screws of the OEM head unit




4. Remove the OEM head unit
Dismount the air vents
Mount the air vents to the new facia plate




5. Remove the middle bar (cut at the position marked with arrows)

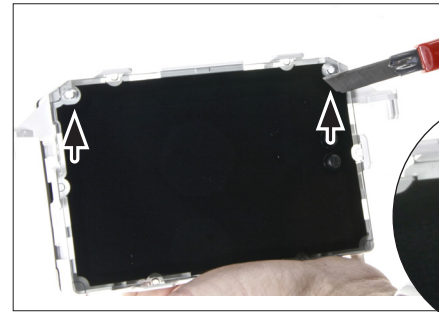


6. Remove OEM display. Cut away overlapping pins left and right

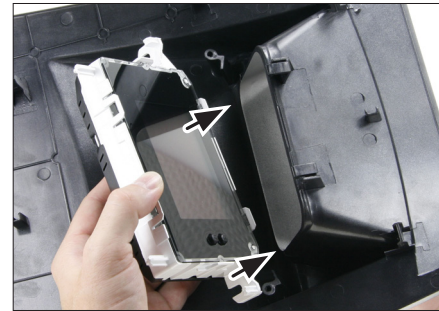



7. Mount OEM display to facia plate:
Turn facia plate upside down
Place OEM display top like shown on the picture

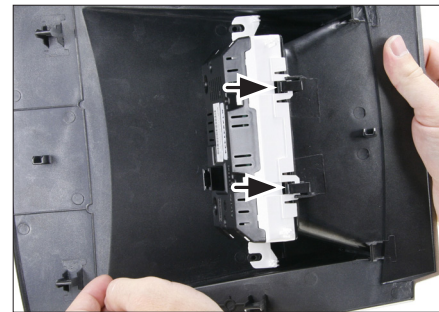


8. Push OEM display bottom until it snaps in

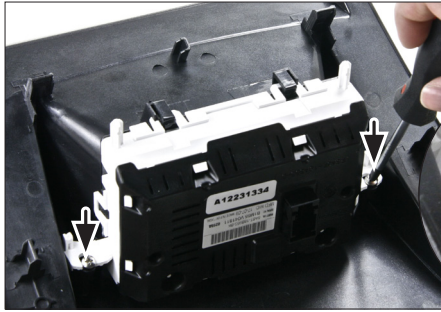

9. Fix OEM display with 2 screws

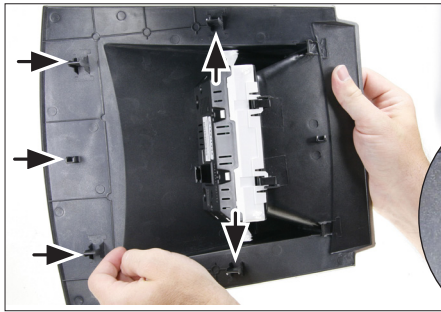

10. Remove clamps from Ford OEM panel. Place clamps on new facia plate



11. facia plate with mounted OEM display



12. Connect all required circuit points of Double-DIN Navigation, mount it to Double DIN facia plate, place it on the dashboard.
Connect cables of OEM display
fix facia plate with mounted OEM display above Double-DIN Navigation