


50-314 - Double DIN Installation (USING 51-012 CAGE KIT)




1. Put four radio release keys in the appropriate slots of the OEM radio



2. Remove the OEM head unit by pulling it towards your direction.

3. Place the mounting frame on the dashboard.




Seat Exeo only:
The mounting frame has to be clipped behind the fixed OEM frame (see photo)




4. Fix the mounting frame with two screws (see arrows)

Push the Metal Frame into the mounting frame

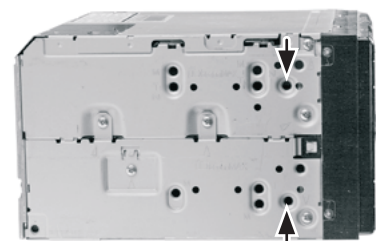

(sample photo)

Mount the metal brackets to the double DIN head unit.

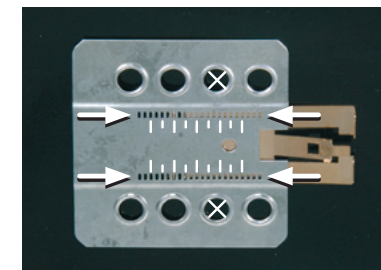

(sample photo)

The position of the copper coloured holder can be adjusted to your needs for perfect fit. (see sample)



5. Connect all required circuit points and push the double DIN head unit in the metal frame until it snaps in.

Place the facia plate to finish installation.

All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.