


7. Bend away metal in order to clear space for double DIN head unit



8. Mount mounting brackets to double DIN head unit.

Use A for : Alpine, Clarion, Pioneer
Use B for : Kenwood 5"
Use C for : Kenwood 7"




9. Connect all required circuit points
Place double DIN head unit and fix it. Place facia plate.

Reinstall everything in reverse order to finish installation

• **Hyundai i30 2012->**

Compatible with these Double-DIN devices:

Double-DIN Navigation

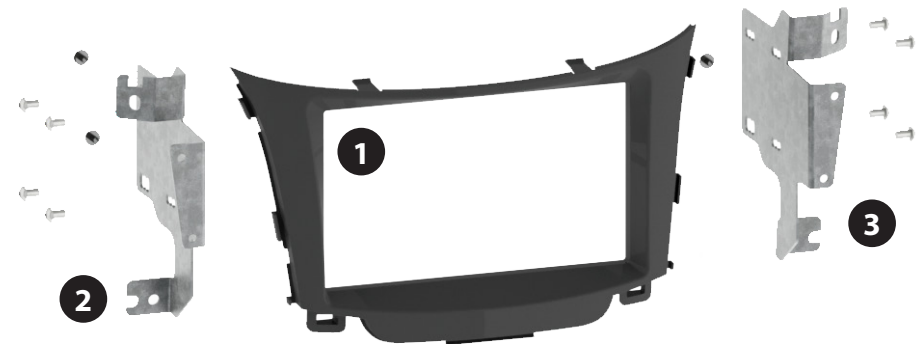

Double DIN Set contents

- (1) Facia Plate

- (2) Mounting bracket (L)
- (3) Mounting bracket (R)

Installation Manual Double DIN Kit



1. Hyundai i30 OEM dashboard



2. OEM side panels need to be removed. Start at this position (see arrows)




3. Remove side panels with air vents at left and right side (see arrows)



4. Remove screws (see arrows)
Remove control unit



5. Remove screws (see arrows)

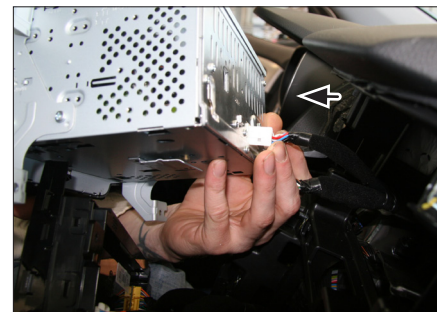

6. Remove OEM head unit

All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.