


29-CTH06

HONDA STEERING WHEEL CONTROL INTERFACE

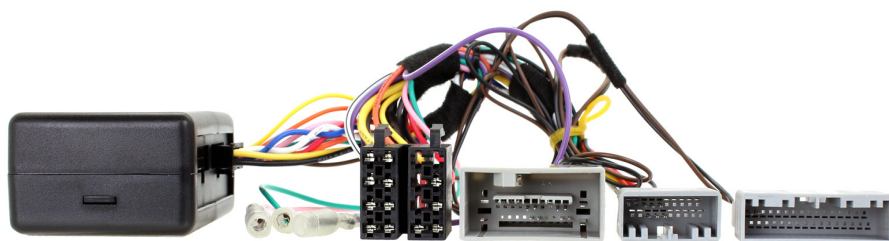

Application:
CR-V (RM1/RM3) 2012 - 2016
Civic-Tourer (9 Gen) 2014 - 2015
Civic (9 Gen) 2012 - 2015

For Non Amplified Vehicles without Navigation

ABOUT THIS PRODUCT...

29-CTH06

Honda Steering Wheel Control Interface for CAN-Bus Vehicles.
NB: Allows Time/Date change from the steering wheel, Bluetooth phone button support. For non-amplified vehicles without navigation. Will not work with Connect system

Product Contents

- 1. Interface
- 2. Harness
- 3. Instruction

Prior to installation

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure you use the correct tools to avoid damage to the vehicle or product.

Wiring Colour Codes

Wire Colour	Function
Yellow	Permanent 12V
Black	Ground
Red	12V Ignition
Orange	Illumination
Pink	Speed Pulse
Green	Park Brake
Purple/White	Reverse

Wire Colour	Function
Purple	Right Rear Speaker +
Purple/Black	Right Rear Speaker -
Green	Left Rear Speaker +
Green/Black	Left Rear Speaker -
Grey	Right Front Speaker +
Grey/Black	Right Front Speaker -
White	Left Front Speaker +
White/Black	Left Front Speaker -

FITTING GUIDE

1. Remove and disconnect the original head unit.
2. Connect the 12 way molex connector of the head unit patch lead (supplied separately) to the interface.



3. Connect the opposite end of head unit patch lead to the head unit steering wheel control input on the back of the aftermarket head unit. This may be a 3.5mm jack plug or a wire input depending upon the head unit brand being fitted.

Please see the head unit installation manual for further information on where to connect.


Important Note: This step must be completed before connecting power to the interface. Failure to so do may result in no steering wheel control function.




4. Connect the 14 way molex connector to the interface

FITTING GUIDE

5. Connect the male power/speaker ISO harness to the female power/speaker ISO harness from the aftermarket head unit. For aftermarket head units without an ISO connector, please refer to the wiring colours on Pg. 2.

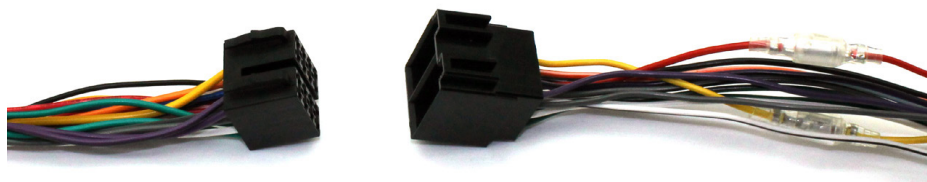


6. Next, connect the Bluetooth connector on the loom (32 pin, brown/black wires) to the vehicle. Firstly, disconnect the OEM Bluetooth connector from the Bluetooth module in the vehicle, and plug the 32 pin connector straight into the OEM connector to bypass the module.



7. Connect the female vehicle specific connector to the male vehicle connector. Test head unit for correct operation.

STEERING WHEEL CONTROL FUNCTIONS

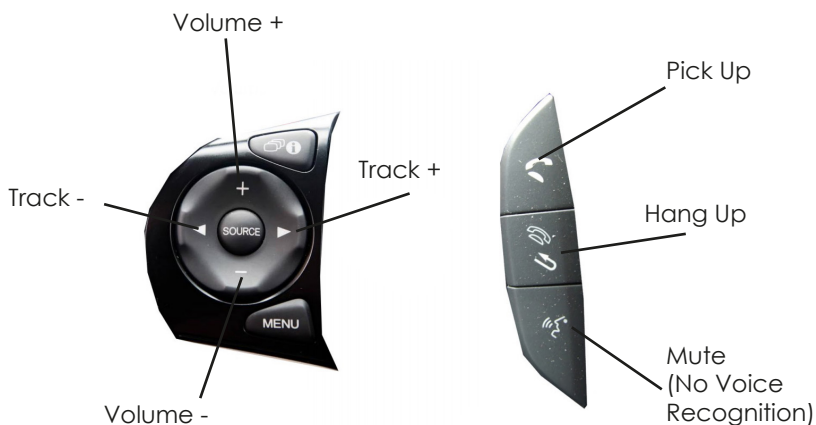

SETTING OF CLOCK/DATE

1. Press and hold **'MENU'** to enter clock setting mode
2. Press **'CH+'** and **'CH-'** to toggle between hour, minute, date, month and year. The relevant character will flash when selected.
3. Change the value of each character by pressing **'VOL+'** and **'VOL-'**
4. Once time and date has been set, press and hold **'MENU'** to exit.