

Wiring diagram for MB-961N

1. Compatibility and DIP settings:




Dip	ON ↓	OFF ↑
1	OFF OFF	OEM rear camera
2	OFF ON	Aftermarket rear camera (CAN detect)
3	ON OFF	Aftermarket rear camera (Reverse detect)
4	OFF	OFF
5	Enable DVR	Disable DVR
6	C / GLC	A/B/E/GLA/GLE/CLA
7	Resolution 1024	Resolution 800
8	Enable front camera	Disable front camera
9	OFF	OFF

Long press 3S "hang up" button on steering wheel to switch to DVR

Note: LVDS transfer from head unit

2. Installation:

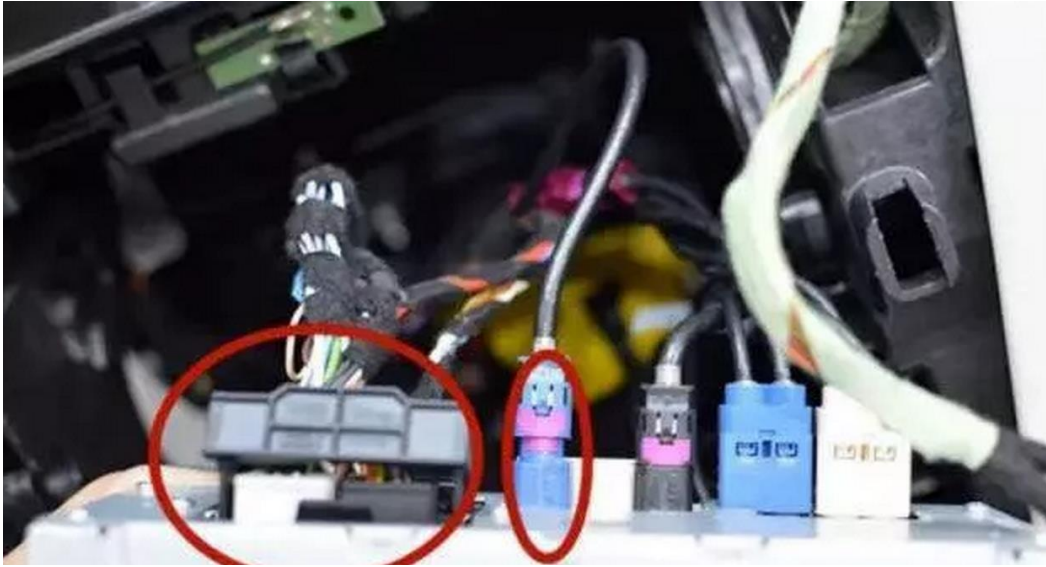

Connect the power cable and LVDS in the red circle