








CONNECTION DIAGRAM

	CAM POWER	Camera 12V out, power supply for Rear camera
	REVERSE DETECT	If screen doesn't switch upon reverse gear, connect to reversing light
	DVR ACC	Power supply for DVR or other video devices
	FRONT CAM	Front Camera In
	REAR CAM	Rear Camera In
	DVR	DVR Camera In



MALE QUADLOCK
Connect to the back of the OEM head unit

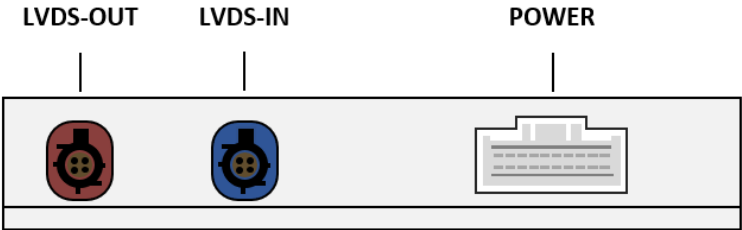

OEM HEAD UNIT

FEMALE QUADLOCK
Connect to the OEM Quadlock connector



OEM UNIT

LVDS-IN
Connect the NEW LVDS cable from the LVDS-IN input on interface to the LVDS connection on the Original head unit

LVDS-OUT
Connect the ORIGINAL LVDS cable from the head unit to the LVDS-OUT input on interface

ORIGINAL
LVDS CABLE

DIP SWITCH SETTINGS

Please disconnect & reconnect interface power after changing any DIP setting



Dip	ON ↓	OFF ↑
1	2013-2016 Peugeot/Citroen/DS/C3-XR ON ON OFF 2013-2016 4008 ON OFF ON	
2		
3		
4	Disable radar	Enable radar
5	Disable parking guide line	Enable parking guide line
6	-	
7	Enable Front view	Disable Front view
8	CAN reverse Reverse detect	OFF ON