

DIP SWITCH SETTINGS

Item No.	Model Years	1	2	3	4	5	6
CPI-VW-MQB	MIB II (7")	ON ▼	ON ▼	OFF ▲	ON ▼	OFF ▲	OFF ▲


DIP	ON ▼	OFF ▲
7	Car without "PARK" button	Car with "PARK" button
8	Add-on MIC	Original MIC

NOTE! Please try another car model DIP settings if your current car model DIP doesn't work. Disconnect and reconnect interface's power for effective after changing any DIP setting.

SWITCH:



Press and hold
"MEDIA / MENU"
button for 3s

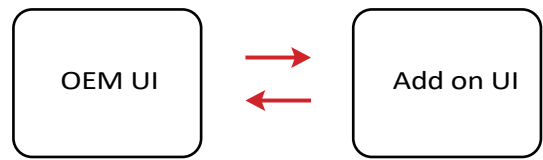


OEM RADIO AUDIO SETTINGS:

1. For car models with stock AUX port, make sure source switch to "AUX" mode on original car stereo for audio transmission before using the integration.
2. For car models with an AMI port, please plug in "AMI to AUX cable (sold separately)" 24-317 then switch audio source to AMI mode.

QUICK RESTART TIPS:

Press and hold the "BACK" button for 10s will restart the integration immediately

WHAT'S IN THE BOX

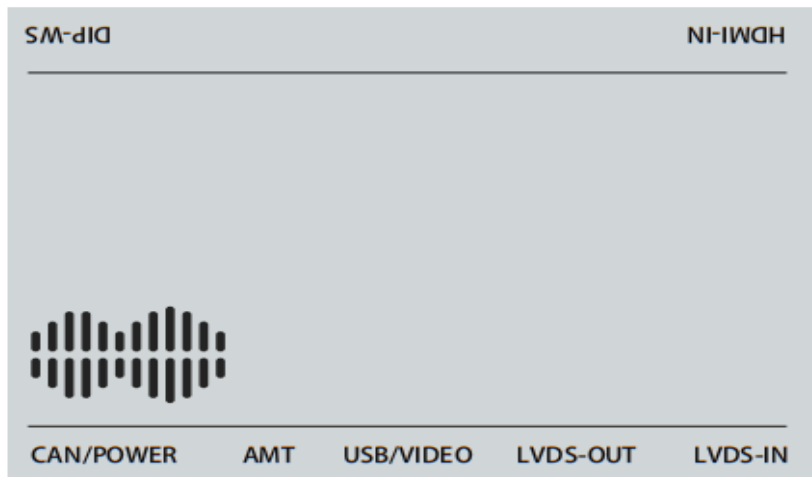

Main unit
Dimension: 148*94*22mm



Power/CAN harness



USB/Video cable



LVDS cable



WiFi/BT antenna