

APPLICATIONS

Toyota Hilux 2005-2010

50-275


KIT FEATURES

- DIN head unit provisions with pocket
- ISO DIN head unit provision with pocket



KIT COMPONENTS

- A) Radio housing • B) Housing brackets • C) ISO brackets • D) ISO trim plate

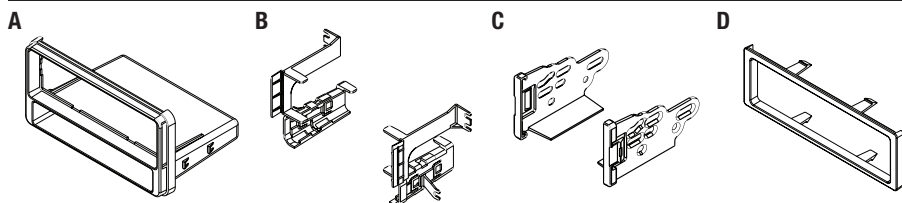

TOOLS REQUIRED

- Panel removal tool • Phillips screwdriver • Socket wrench • Small flat blade screwdriver



Table of Contents

Dash Disassembly

– Toyota Hilux 2005-20103

Kit Assembly

– DIN head unit provision.....4


– ISO DIN head unit provision5

Dash Disassembly


Toyota Hilux 2005-2010

1. Remove the (3) climate control knobs by pulling straight outward. (Figure A)
2. Remove (1) Phillips screws from behind the center knob.
3. Unclip and remove entire trim panel surrounding the radio. (Figure B)
4. Remove (4) 10 mm bolts to securing the radio. (Figure C)


Continued to kit assembly

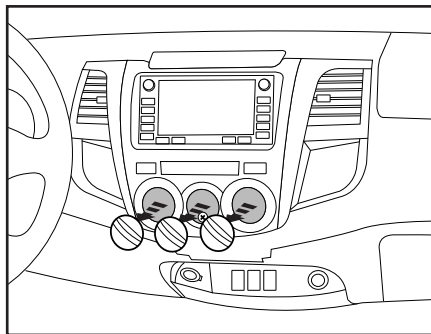

(Figure A)

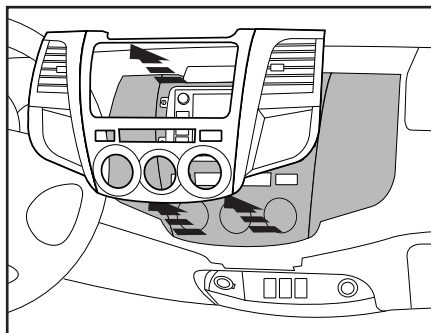

(Figure B)

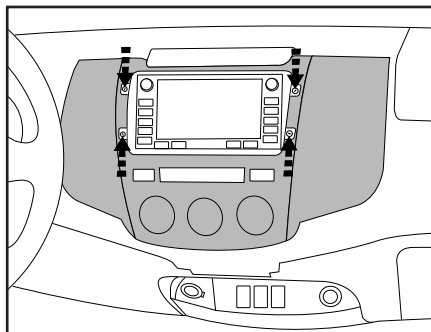

(Figure C)


Kit Assembly

DIN head unit provision


1. Locate the factory wiring harness in the dash. Re-connect the negative battery terminal and test the unit for proper operation.
2. Slide the mounting brackets onto the sides of the radio housing until the side clips engage. (Figure A)

Note: Tabs are marked left and right.


3. Slide the DIN cage into the radio housing and secure by bending the metal locking tabs down. (Figure B)
4. Slide the aftermarket head unit into the cage and secure. (Figure C)
5. Snap the trim plate into the radio housing. (Figure C)
6. Reassemble dash in reverse order of disassembly.

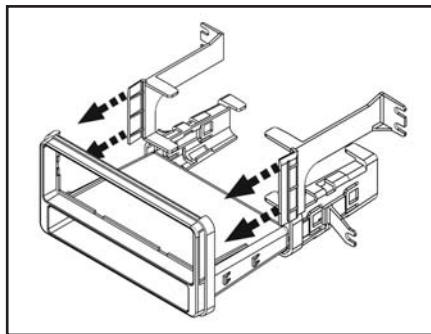

(Figure A)

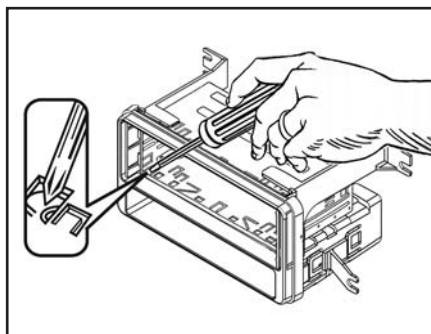

(Figure B)

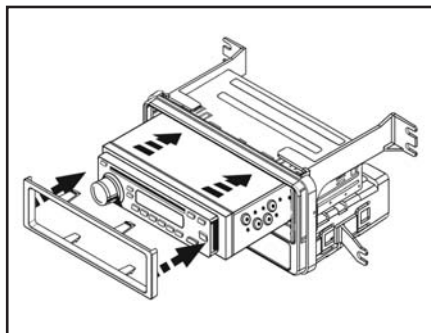


(Figure C)


Kit Assembly

ISO DIN head unit provision


1. Locate the factory wiring harness in the dash. Re-connect the negative battery terminal and test the unit for proper operation.
2. Slide the mounting brackets onto the sides of the radio housing until the side clips engage. (Figure A)
Note: Tabs are marked left and right.
3. Mount the ISO brackets to the head unit with the screws supplied with the unit. (Figure B)
4. Slide the head unit into the radio opening until the side clips engage. (Figure C)
5. Snap the trim plate into the radio housing. (Figure C)
6. Reassemble dash in reverse order of disassembly.

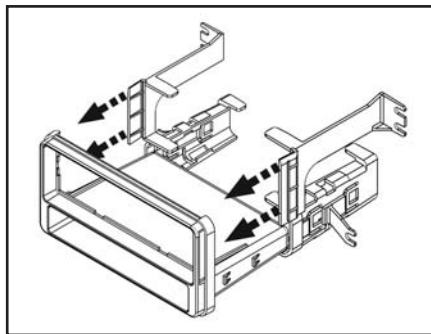

(Figure A)

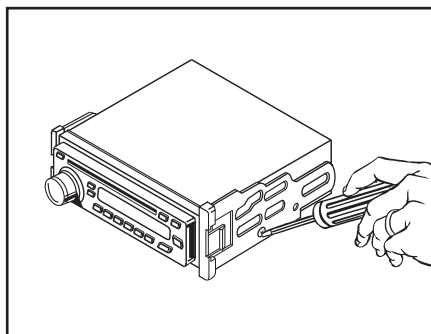

(Figure B)

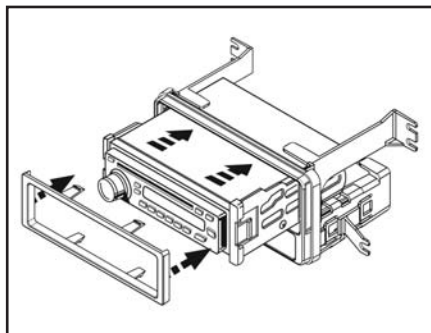

(Figure C)