



The amplifier on a Lexus RX (04-06) with Mark Levinson sound can be found just behind the back seat, under the forward edge of the boot floor and rear cross member.

When fitting an after market radio, the amplifier can be bypassed with this cable.

With the amplifier bypassed, the new head unit will drive the speakers. Only the door speakers and front tweeters are retained. The centre speaker is not retained.


### INSTALLATION

Unplug the power and speaker connections from the amplifier, due to the location of the amplifier these face downwards towards the floor and space is quite tight. Connect the 16 pin connector of the 20-315 bypass cable to the corresponding wiring that has just been disconnected from the amplifier.

To connect the front tweeters, take the 25 pin connector that has been unplugged from the amplifier. There is 4 larger pins at one end, these are for the tweeters. The smaller pins and the 2 large pins at the other end can be ignored.

As per the picture below, connect the loose fly leads into the 4 larger pins, making sure they are pushed in fully and secure so that they will not come loose and short on the body of the car.

- PIN 1: GREY/BLACK**
- PIN 2: WHITE/BLACK**
- PIN 3: GREY**
- PIN 4: WHITE**

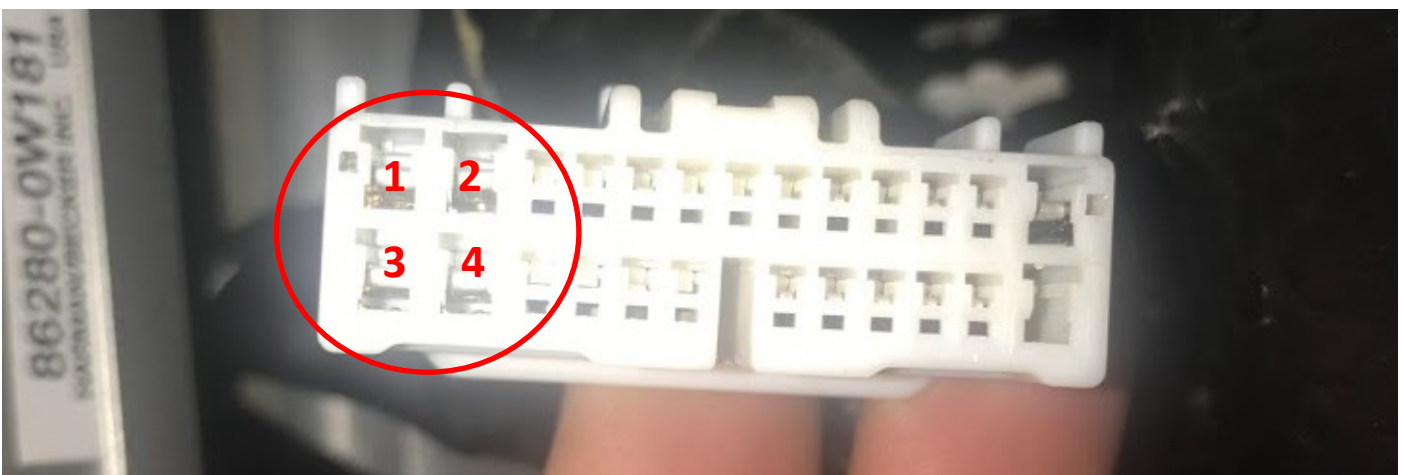

Use the 5 meter ISO extension provided with the 20-315 to run the speaker leads up to the back of the new radio in the dashboard.

**PLEASE NOTE THAT THIS CABLE IS ONLY FOR LEXUS RX MODELS WITH MARK LEVINSON SOUND BUILT BETWEEN 2004 AND 2006. IT IS NOT SUITABLE FOR VEHICLES WITH THE STANDARD SOUND SYSTEM OR LATER 2007 ONWARDS CARS.**