


## Before installing

1. Make sure the ignition supply to the vehicle is turned off
2. Ensure the head unit is removed from the car ensuring easy access to the connections on the back of the original unit.

## Connecting the Jack lead

1. Connect the Ducato specific connector (Red Connector Plug) to the vehicles original radio connector
2. Connect the 3.5mm jack plug to the back of the Kenwood 8021 (Labelled REMO)
3. Connect the ISO radio lead (Supplied with the Kenwood radio) to the corresponding female ISO connections from the back of the radio.

Please refer to the manufacturers instructions to confirm this.

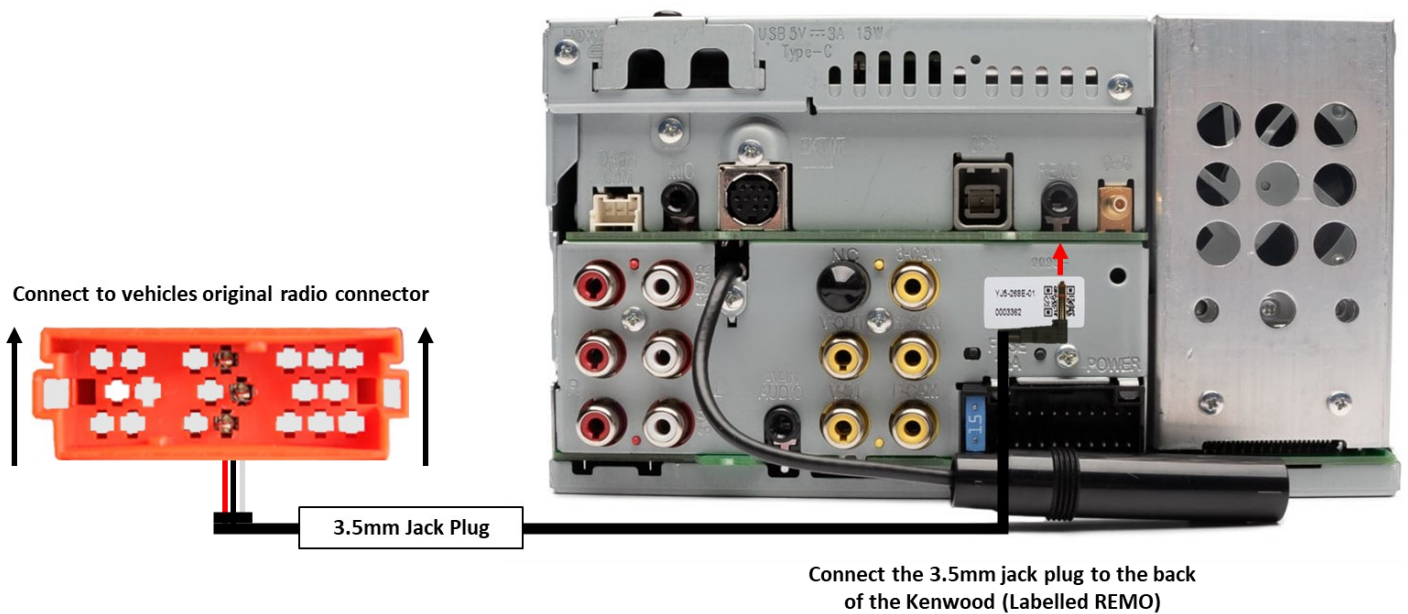


## PLEASE NOTE

The steering wheel controls will still need to be programmed on the Kenwood head unit before they will work.

Please see over sheet on how to program these.

## Programming the Steering Wheel Controls


1. Select DEMO OFF then FINISH

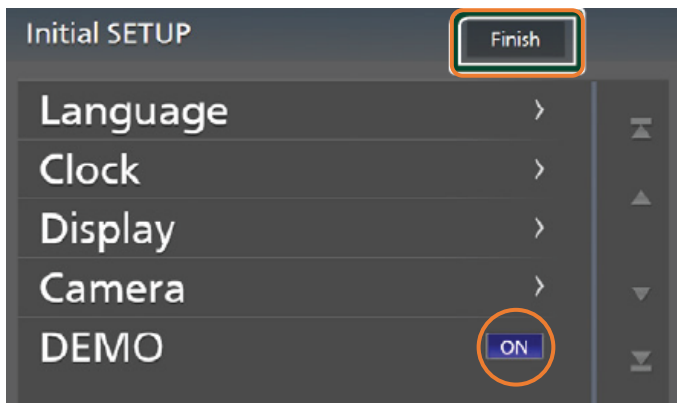


2. Select AGREE




3. Select the GRID ICON

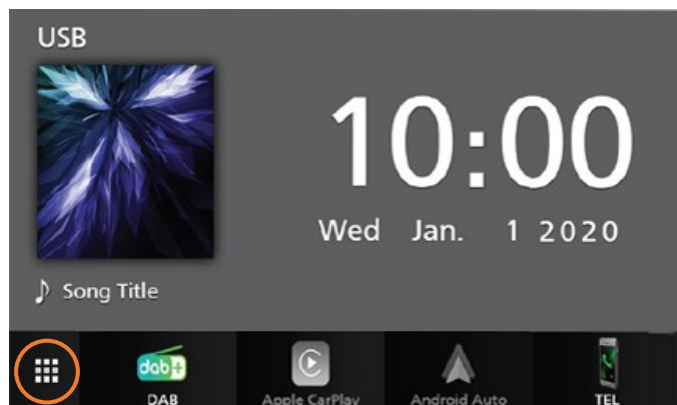

4. Select the SETTINGS ICON

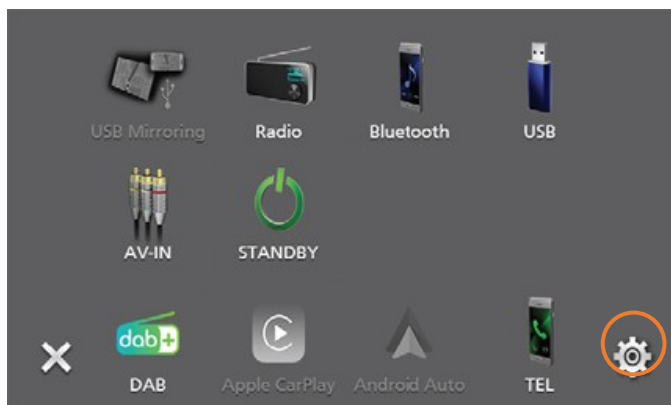

5. Select USER INTERFACE

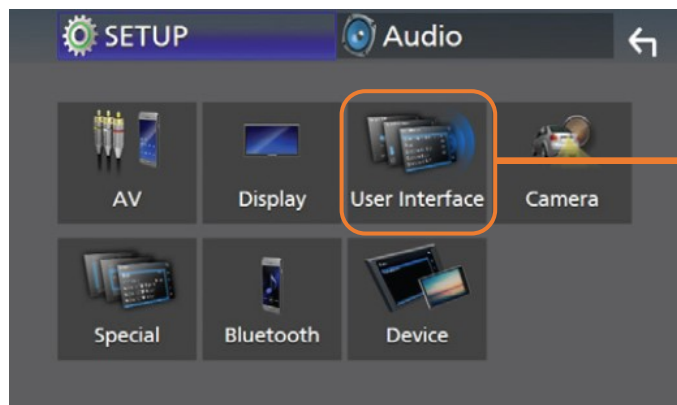


6. Select STEERING REMOTE CONTROLLER

Touch **Steering Remote Controller** in the User Interface screen.

➤ Steering Remote Controller screen appears.

7. Select the function you wish to program

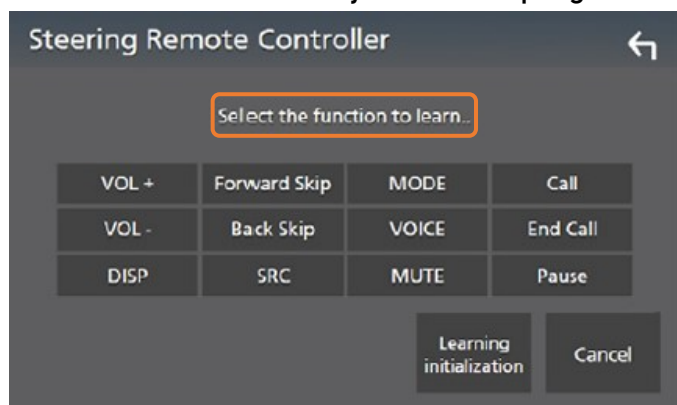

8. The screen will say LONG PRESS A KEY




9. Press and hold the steering wheel button you wish to assign.




10. If programmed, the screen will show SUCCESS and the button highlighted.




11. Repeat steps 7-10 until all the steering wheel buttons are assigned

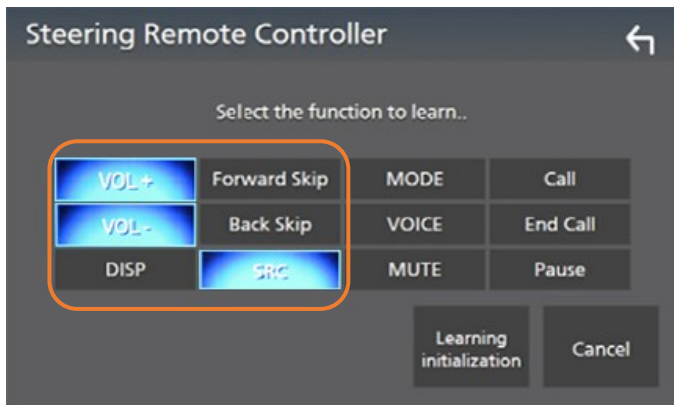


12. To save these settings press the BACK ARROW in the top right corner

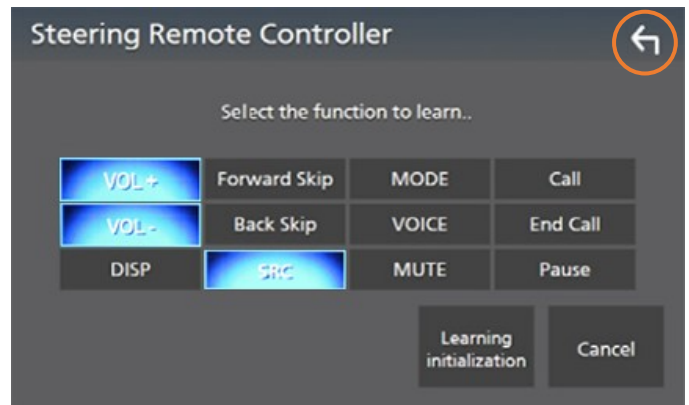

12. If you make a mistake whilst programming the functions press CANCEL

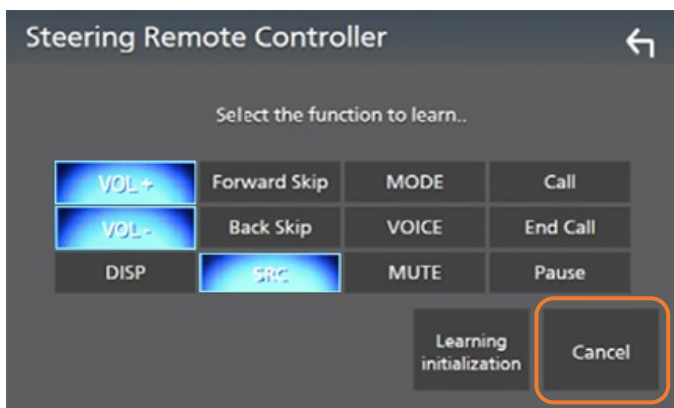

13. To start the process from the beginning press LEARNING INITIALISATION

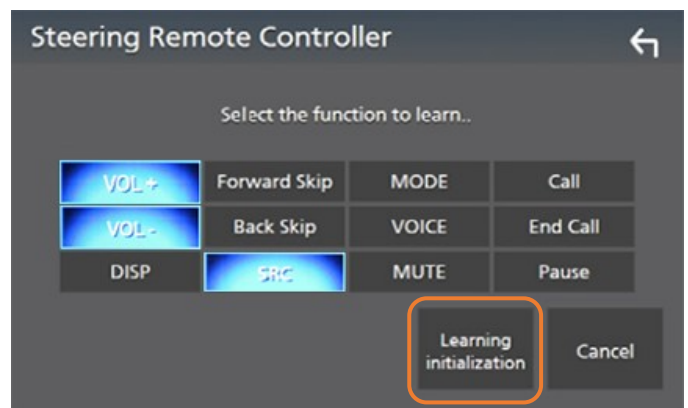

Test the Kenwood head unit fully, ensuring all the steering wheel control functions are working properly before fixing the new head unit into the vehicles dashboard.