

BLAM EXPERT DRIVER



Driven by passion.

TW AMT 100



Tweeter

- Max power 100 W / Nom. power 10 W
- Frequency response 2.5 kHz - 28 kHz
- Sensitivity 90 dB
- Impedance 3 Ohms


Mylar dome tweeter - 19 x 3 mm (0.75" x 0.12") Neodymium motor (N42) - Mounting accessories : recessed or inclined support

TECHNICAL SPECIFICATIONS

Component	Tweeter	
Max power	100 W	
Nominal power	10 W	
Impedance	3 Ω	
Freq. Response	2.5 kHz - 28 kHz	
Efficiency (2,83V/1m)	90 dB	
Magnet	Neodymium N42	
Magnet size $\varnothing$ x h	12 x 3 mm	0,472" x 0,118"
Total driver displacement	-	-
Weight of one component	0.032 kg	0,071 lb
Voice coil $\varnothing$	13 mm	0,512"
Voice coil height	1,5 mm	0.059"
Cone	mylar dome	

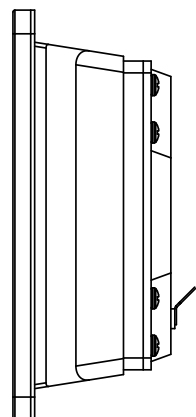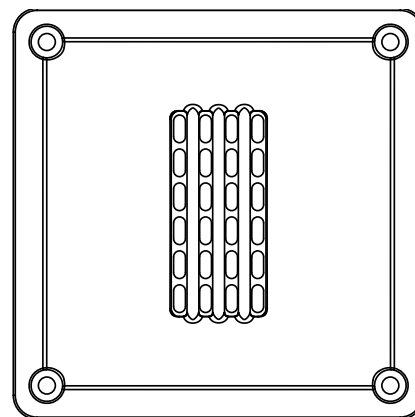

FREQUENCY RESPONSE / IMPEDANCE

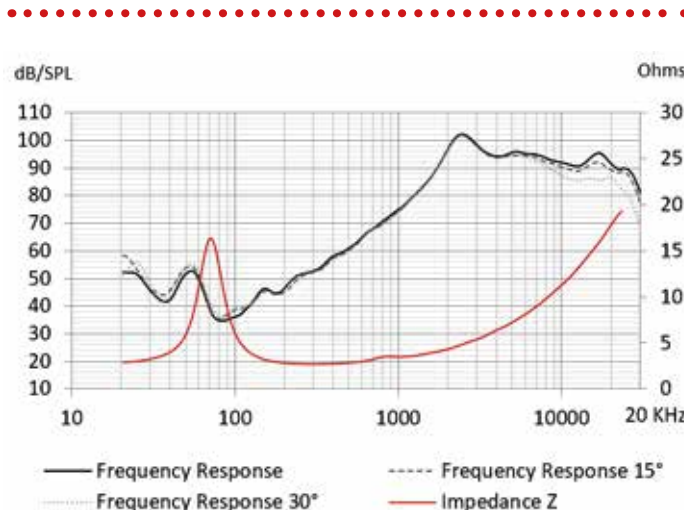

THIELE-SMALL PARAMETERS

effective $\varnothing$ (d)	18 mm
Sd	3.14 cm ²
Xmax	-
Re	3.3 Ω
Fs	1600 Hz
Le	-
L2	-
Vas	-
Mms	-
Cms	-
BL	-
Qts	-
Qes	-
Qms	-
Sensitivity (dB/W/m)	86 dB