
• Fiat Doblò 2010->

Compatible with double DIN devices





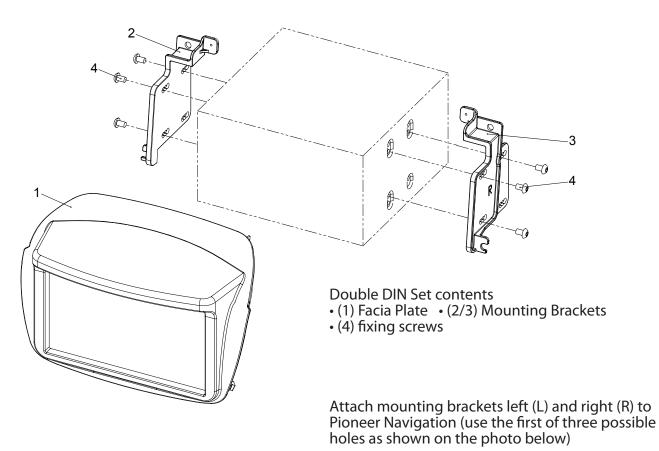

Installation Manual Double DIN Kit: Fiat Doblò 2010->

Please study the installation manual carefully, before you start. The installation requires some cutting works of the OEM-Panel. All OEM screws have to be reused again



1. Remove OEM Radio with special radio release keys



2. Remove 2 screws (left and right)



3. Remove screws holding center panel (see arrows)

Info: You have to reuse the screws later

Unclip center panel

Remove center panel

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidential or indirect damages.

4. Disassemble center panel (you have to reuse the screws later!)





5. Cut upper part from center panel inlay (the upper part - see cross - won't be needed anymore)








6. Cut this part at center console (see dashed line)







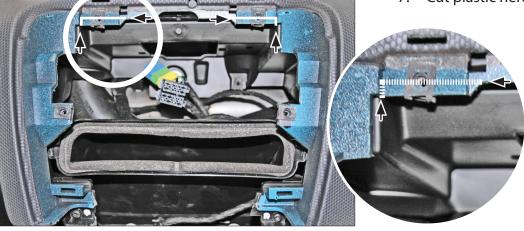

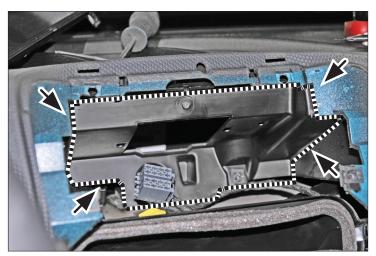

Cut plastic in order to clear space for double DIN head unit (see dashed line)

Assemble center panel Mount Navigation to center panel

Important: On top, the mounting bracket has to be BEHIND the OEM frame with the screwhole. On bottom the mounting bracket has to be in FRONT of the OEM frame. (see sample photos)

Connect all required circuit points. Mount complete center panel. Place facia plate



